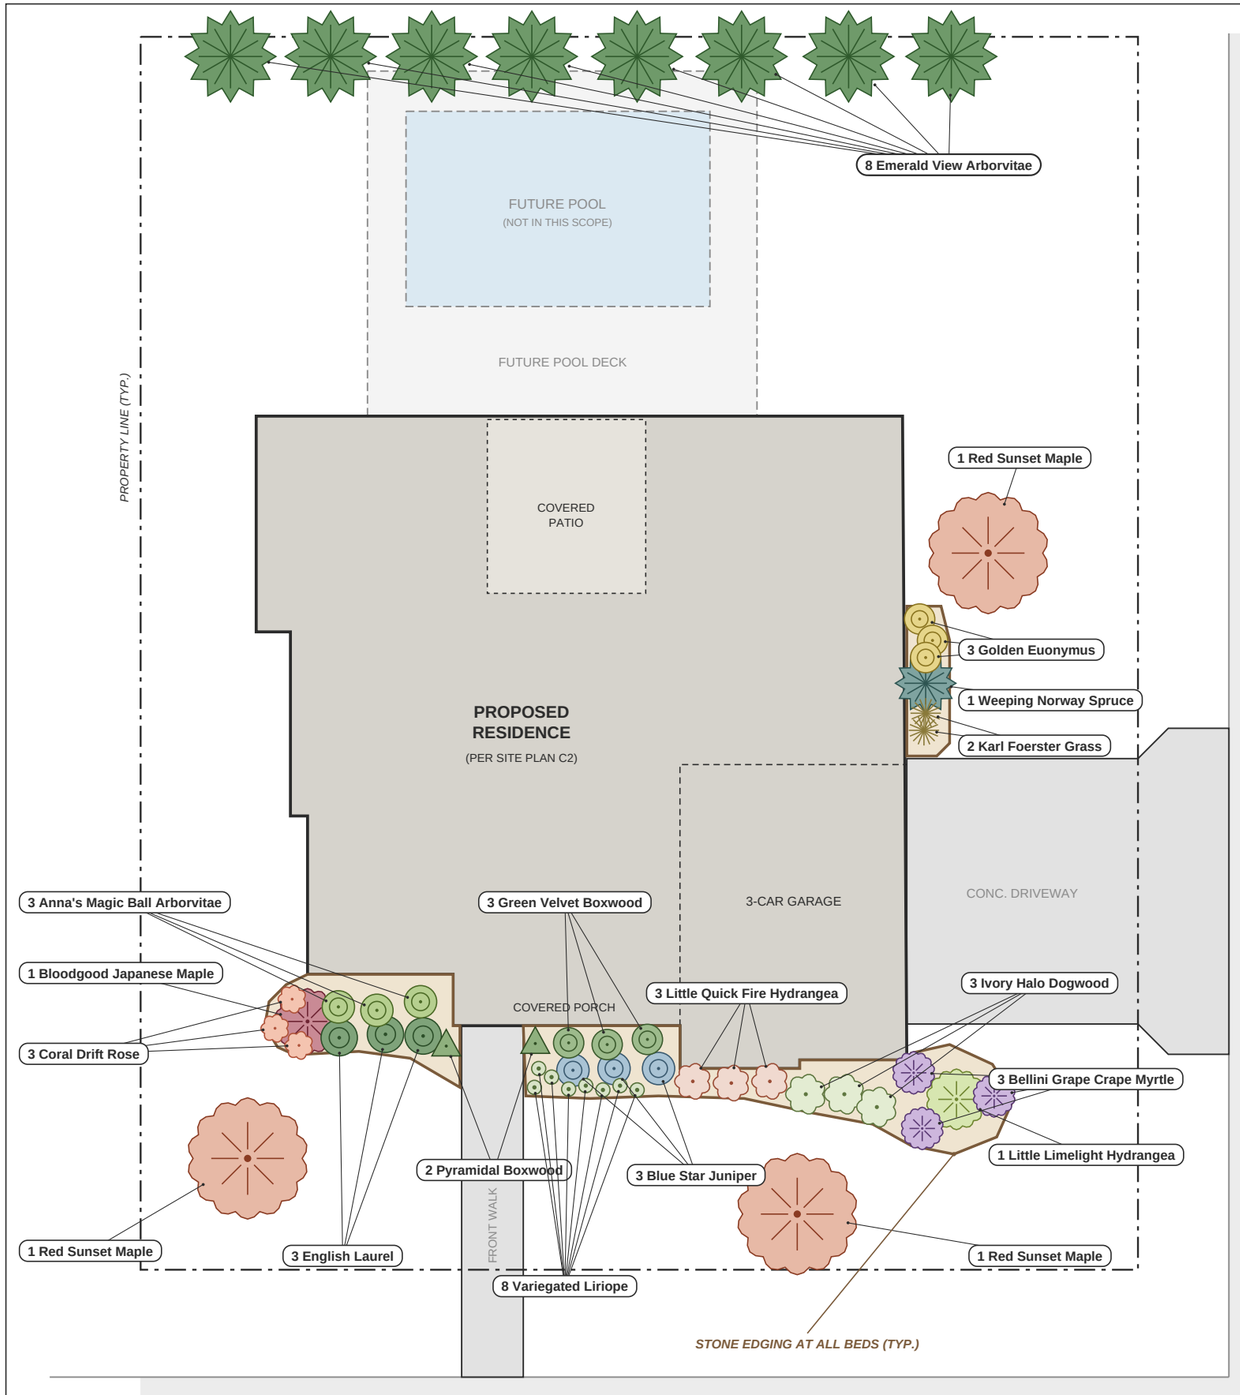


0 15 30 FT

LANDSCAPE PLAN

SCALE: 1" = 15'-0" (11x17 SHEET)

N

PLANT SCHEDULE

	KEY	QTY	COMMON NAME	BOTANICAL NAME	INSTALL SIZE
TREES					
	RSM	3	Red Sunset Maple	*Acer rubrum 'Franksred'*	2.5" cal.
	JBM	1	Bloodgood Japanese Maple	*Acer palmatum 'Bloodgood'*	2.5" cal.
	LLT	1	Little Limelight Hydrangea (tree form)	*Hydrangea paniculata (tree form)*	2.5" cal.
	BCM	3	Bellini Grape Crape Myrtle	*Lagerstroemia 'Bellini Grape'*	5 gal., 18" ht.
	WNS	1	Weeping Norway Spruce	*Picea abies 'Pendula'*	5' - 6'
	EVA	8	Emerald View Arborvitae	*Thuja 'Emerald View'*	6' - 7'
SHRUBS					
	IHD	3	Ivory Halo Dogwood	*Cornus alba 'Bailhalo'*	5 gal., 18" ht.
	LQF	3	Little Quick Fire Hydrangea	*Hydrangea paniculata 'SMHPLQF'*	5 gal., 18" ht.
	CDR	3	Coral Drift Rose	*Rosa Drift® Series, Coral*	5 gal., 18" ht.
	EL	3	English Laurel	*Prunus laurocerasus*	5 gal., 18" ht.
	AMB	3	Anna's Magic Ball Arborvitae	*Thuja occidentalis 'Anna's Magic Ball'*	5 gal., 18" ht.
	PB	2	Pyramidal Boxwood	*Buxus sp. (pyramidal form)*	5 gal., 18" ht.
	GVB	3	Green Velvet Boxwood	*Buxus 'Green Velvet'*	5 gal., 18" ht.
	BSJ	3	Blue Star Juniper	*Juniperus squamata 'Blue Star'*	5 gal., 18" ht.
	GE	3	Golden Euonymus	*Euonymus japonicus 'Aureomarginatus'*	5 gal., 18" ht.
GRASSES & GROUNDCOVER					
	KFG	2	Karl Foerster Feather Reed Grass	*Calamagrostis × acutiflora 'Karl Foerster'*	5 gal., 18" ht.
	VL	8	Variegated Liriope	*Liriope muscari 'Variegata'*	5 gal., 18" ht.
	TOTAL	**53**			

LEGEND

- Planting bed with stone edging
- Proposed residence (per Site Plan C2)
- Concrete driveway / walk
- Future pool & deck (shown for reference, not in this scope)
- Property line
- 3 — Plant callout: quantity and common name (see schedule)

GENERAL NOTES

1. Base information (property lines, residence, driveway, walk and future pool) is taken from Site Plan Sheet C2, 509 Venneman Ave., prepared by MB Engineering, Rev. 2 dated 10-12-26. It is shown for reference only.
2. Plant locations are diagrammatic. Final placement to be field-adjusted to suit site conditions.
3. Contractor shall have all underground utilities located prior to excavation (Missouri One Call, 811).
4. All plant material shall conform to ANSI Z60.1, American Standard for Nursery Stock.
5. All planting beds to receive stone edging as shown.

PROJECT
509 Venneman Ave.
Glendale, MO 63122

DRAWING
Landscape Plan

ISSUED FOR
Review Board Submittal

DATE
10-27-2026

SCALE
1" = 15'-0"

PREPARED BY
Bopp Landscaping

REVISIONS

NO.	DATE	DESCRIPTION

SHEET
L1